

WULFTEC® Heavy duty 5,000 lbs Capacity conveyors



Featuring:

BALDOR
Baldor Motors
&
Winsmith Reducers
WINSMITH
PEERLESS-WINSMITHINC.

Wulftec has built a solid reputation on being experts in the conveyor industry with multiple conveyor solutions for all industries. Having a Wulftec® conveyor on the production line is a powerful statement. It's an investment in strong values because Wulftec is dedicated to manufacturing only the best. It's an investment in all steel construction, for increased stability and strength. It's an investment in success, because Wulftec® equipment is designed and built to last load after load, year after year.

STATE-OF-THE ART CONSTRUCTION



- 1/4" thick side rails
- All rollers driven roller to roller with #40 chain
- Maintenance free cast iron housing sealed bearings
- Adjustable structural steel leg assemblies
- Interchangeable feet to allow pass height changes
- Fully enclosed, guarded chains, top and bottom
- Fully enclosed, top and bottom chain guard and drive system guard
- One side driven, for easy loading and unloading
- 5,000 lbs capacity
- Best warranty in the industry (3 years)

CHAIN GUARDING

- Full guarding top and underneath the conveyor
- Totally enclosed drive system
- No chain pinch points

VERSATILITY

- 24VDC components
- Non-proprietary parts throughout
- Variety of lengths, widths and heights available
- Many available options (refer to back page)



ROBUST ROLLER FEATURES

- 3/8" wall tubing
- 2 1/2" dia. rollers on 3" centers
- One piece stub shafts machined from solid steel bar
- Hardened sprocket teeth
- 1" diameter bearing shaft
- Full weld around circumference of tube
- Tubing machined at both ends to ensure concentricity

ADJUSTABLE DRIVE SYSTEM

- Easy to adjust without guard removal
- Access from top of conveyor
- Drive unit mounted below conveyor guard for more protection
- Easy access to the drive unit from top, side or bottom
- Synthetic gearbox lubrication
- All quick disconnect wiring for easy installation & maintenance
- 1 HP - 230 / 460 VAC TEFC motor
- 30 FPM, up to 60 FPM available

THE WULFTEC ADVANTAGE

- Non-proprietary parts
- Easy integration into existing lines
- Local support with qualified technicians for installation, integration, repairs, inspection...
- Parts delivered within 24 hours
- We offer advisory service



WE FEAR NO PACKAGING CHALLENGE

WWW.WULFTEC.COM


OPTIONS AVAILABLE

- Adjustable pass height
- Customized conveyor length
- Side loading
- Pop up rotator
- Centering device
- Belt conveyor
- Index table
- BFR adaptable to specifications
- Up to 6,000 lbs weight capacity
- Pop up
- Chain transfer conveyor
- Shuttle conveyor
- Multi-strand chain conveyor
- Washdown motor

OUR STRENGTH: INTEGRATION

- We offer self-controlled conveyor lines with a control panel, Allen Bradley PLC, contactor or variable AC frequency drives
- Conveyor line fully tested and pre-wired upon request
- Easy integration with existing conveyor lines, transfers, turntables, etc...

**GET A QUOTE
FOR A WULFTEC®
CONVEYOR
TODAY!**

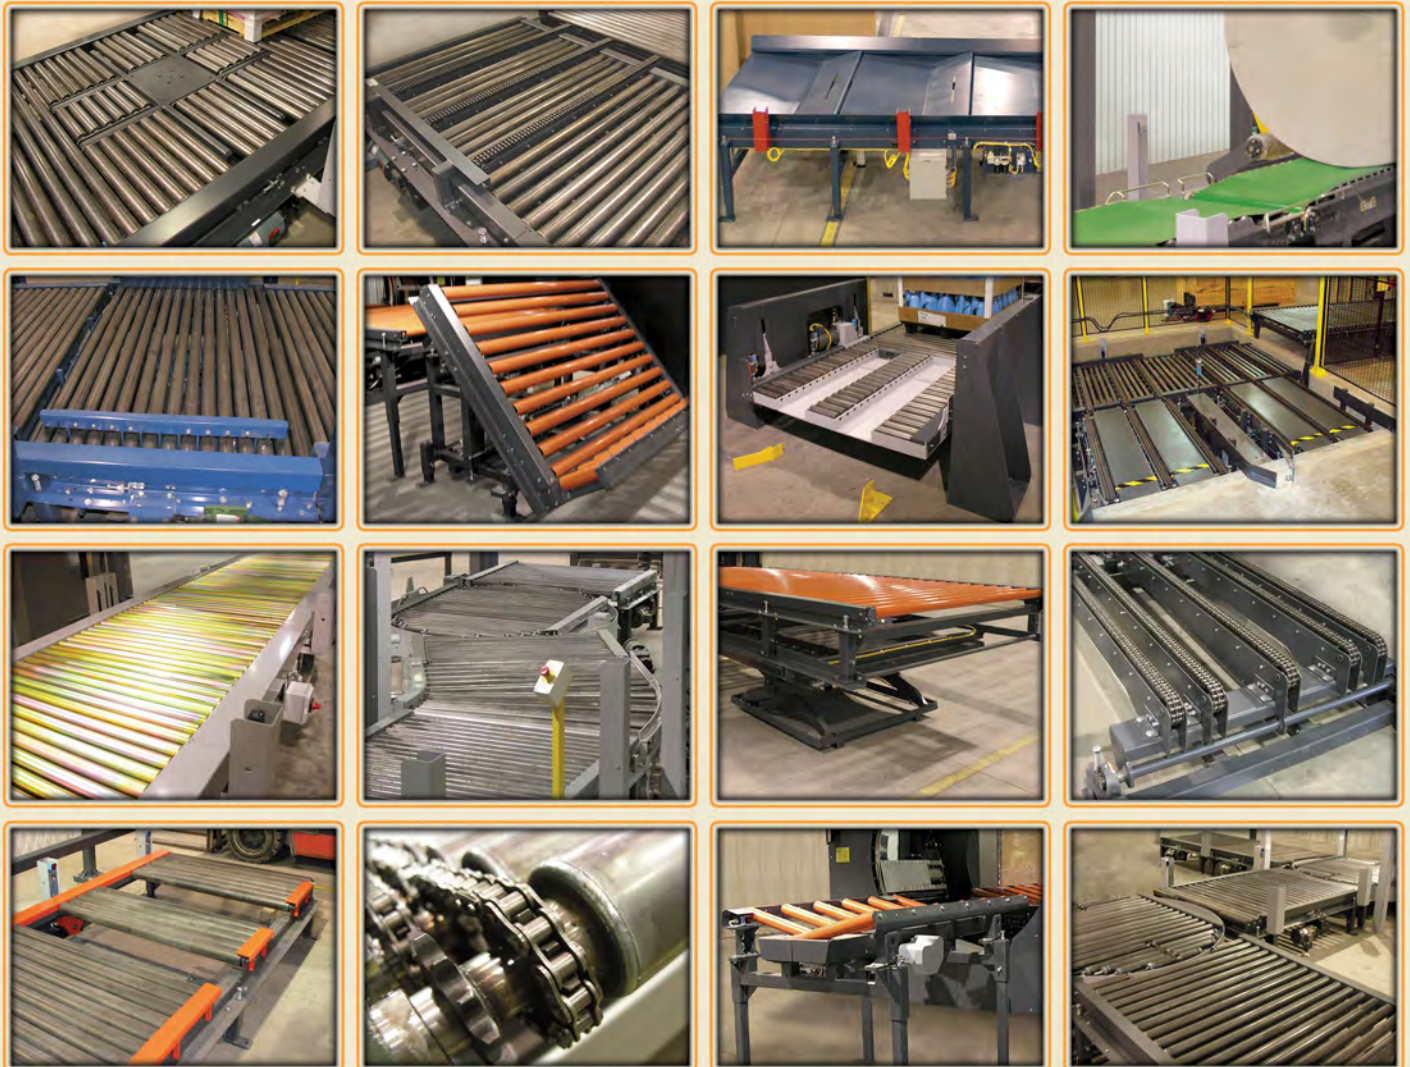

April 2016



M.J. MAILLIS
WULFTEC.com

Wulftec International Inc.
209 Wulftec, Ayer's Cliff, Quebec, Canada J0B 1C0
Toll free: 1 877 WULFTEC (985-3832)
Phone: 819 838-4232 Fax: 819 838-5539
Email: wulftec@wulftec.com